

FP3 Labor & Birth Pool Datasheet

Variant A: with Overflow



Edel Immersys Advantage

Infection and injury prevention focus

Collaborative product design process

Made in USA

Liability insurance \$7mm

Shipping from inventory in NC, USA

20th anniversary in 2024: deep experience

IAPMO Z124 compliant

Instant Quote available on edelimmersys.com



FP3 Benefits

Physical safety & comfort for both mother and attendant built in

21" water depth, deep enough for bouyancy and safe birthing

Wide flat rim tapers for easy access

Internal level seat also functions as a step

Molded handle device also facilitate comfortable access to monitor fetal heart

Stable chrome step unit included

Infection prevention design focus

No jets

No surface joins except drain & overflow

Attractive and confidence inspiring

Acrylic surface high lustre & easy to maintain

Chrome drain-waste-overflow assembly



Nothing to go wrong

FP3 Labor & Birth Pool

Variant A: with Overflow

Technical Specifications

Installation Type	Freestanding on a level floor in a dry room. Minimum distance around 3 sides of pool 18"; Recommended distance 30"
Dimensions - External	70½" L x 48¾" W x 31" H
Dimensions - Internal	61½" L x 27⅞" W x 26" H
Water Depth	21½" to overflow
Water Capacity	146 US gal filled to overflow
Overflow	Yes, to comply with building codes; also available without overflow
Weight Empty	176lb
Weight including Water	1,400lb
Seat	Yes
Color Options	White or Biscuit
Handles	2 molded handle devices
Patient limits	On the rim/deck: 1 adult up to 300lbs. Inside the pool: 2 adults up to 600lbs total.
Drain	1 ½" drain with single-use cap- style plug & chain.
Waste Plumbing	1 ½" brass connection through floor or wall. Trapped per state regulations. Trap not supplied
Electrics	None
Water Supply	¾" through mixing valve and faucet with throw of 6". Valve and faucet not supplied
Material	Cast Lucite acrylic. Two shells bonded and reinforced.
External Step	Chrome two step unit with handrail

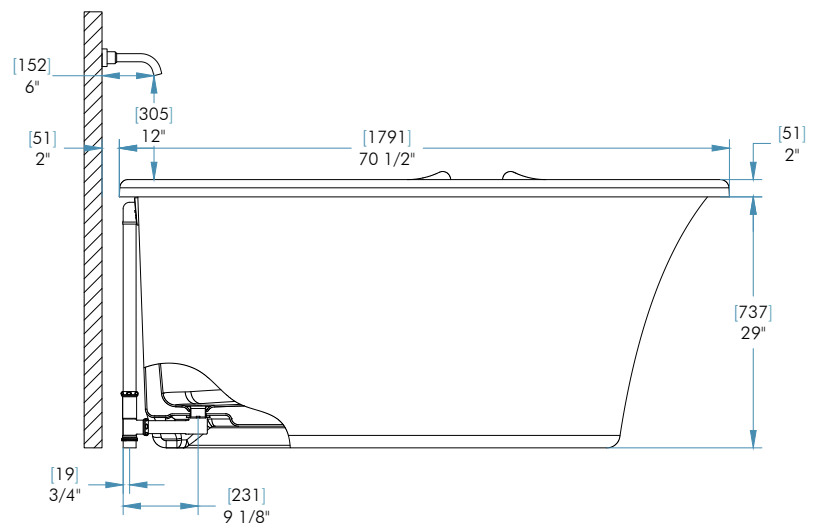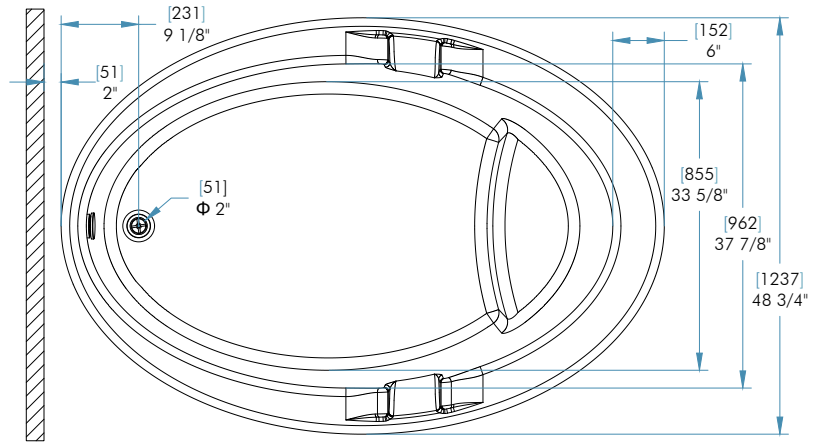

Notes:

1. A freestanding water supply assembly can be used where no adjacent wall is available.
2. FP3 is designed for installation in a dry room. Do not install into a wet room.

Shipping Specifications

Packaging	Wood crate on 2-way pallet base. Non-stackable.
Dimensions	78" L x 55" W x 46" H
Weight	440lbs

Dimensional Tolerance +/- 3/8" (9.5mm). Dimensions needed for site preparation should be measured from the unit. edel immersys assumes no responsibility for preparatory work.